



K-RSC5352N

540TVL Day/Night Color Camera with Super Digital Noise Reduction Technology

Lens: not included



Dimensions (UNIT : mm)

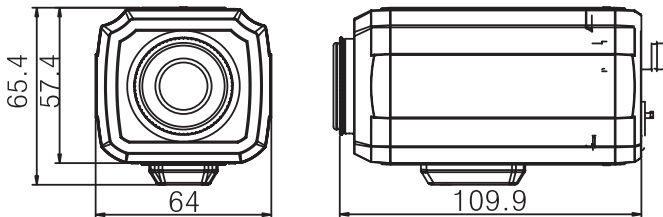

Rear View

Features

- 1/3" SONY Super HAD CCD Sensor
- Day/Night (Digital Slow Shutter) with Color Lock,
Min. Illumination: 0.3lux, 0.002lux (Sense-up x2 ~ x128)
- 540 TV Lines (Ultra High Resolution)
- Amazing DVR Disk-Space-Saving SDNR Technology
(Super Digital Noise Reduction)
- Excellent Auto-Tracking White Balance and Color
Rolling Suppression
- Adjustable Backlight Compensation (three level)
- Adjustable Sharpness Settings (0-31)
- Multi OSD functions built-in
- DC12V/AC24V Dual Voltage

Specification

ITEM	K-RSC5352N
Signal System	NTSC
Image Sensor	1/3" SONY Super HAD CCD Sensor
Effective Pixel	768H x 492V
Scanning System	525Lines, 2:1 Interlace
Scanning Frequency	15.734KHz (H), 59.94Hz (V)
Resolution	540 TV lines (Ultra High)
Shutter Speed	1/60~1/120,000 sec.
S/N Ratio	More than 50dB (AGC Off)
Sync. System	Internal / Line Lock Mode
Min. Illumination	0.3lux, 0.002lux@f1.2 (Sense-up)
ELC	On / Off
Flickerless	On / Off
Back Light Comp.	On / Off / Adjustable
Video Output	VBS 1.0Vp-p (75 ohm)
AGC	On / Off
Auto Iris Mode	DC / Video Selectable
Lens Mount	C / CS Mount
Power Requirements	DC 12V / AC 24V Dual Voltage
Power Consumption	3.0 Watt Max
Operating Temp.	-14F ~ +122F
Ambient Humidity	90% RH Max
Dimension	64mm(W) x 57.4mm(H) x 109.9mm(L)

Specifications are subject to change without any prior notice.